


# 5626

Special longarm unison feed chainstitch sewing machine (max. 10 needles)



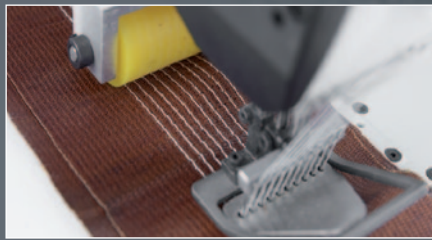

## Area of application:

Special operations in the areas leather, airbag, tire cord, e.g. straight sewing of transport belt fabric or tire cord fabric

## Features:

- Very high stitch quality for top stitching and decorative seams in the visible area
- High traction due to unison feed (bottom feed and alternating top and needle feed)
- The 5626 work with parallel located loopers which move in sewing direction (Inline)
- Simple threading, owing to swing-out loopers. All threading points are accessible from the front of the machine.
- High top feed stroke; max. 7 mm
- Fabric clearance under the foot: max. 11 mm
- Option: Puller with automatic puller foot lift
- Option: Integrated compressor
- Option: Thread draw-off device for tension free and twist-free draw-off of the sewing threads
- Web pass height: on customer request
- Further fittings on request

## Technical data:

- Max. sewing speed: 2,000 s.p.m.
- Stitch length (max.): 6,0 mm
- Needle gauges: 4,8 to 60 mm
- Arm clearance: 700 mm

### **PFAFF Industriesysteme und Maschinen GmbH**

Hans-Geiger-Str. 12 – IG Nord  
D-67661 Kaiserslautern

Telefon: +49-6301/3205-0  
Telefax: +49-6301/3205-3171  
E-mail: [info@pfaff-industrial.com](mailto:info@pfaff-industrial.com)