

MAUSER
S P E Z I A L

卓越的接缝
Excellence in seaming

MH 1641

一体型上下复合送料厚料平缝机

Integrated upper and lower compound feed
thick material lockstitch sewing machine



“毛瑟” 品牌的历史里程碑 / *Milestones in the history of trademark “MAUSER”*

- 1812 The royal armaments factory in Oberndorf is founded
位于奥伯恩多夫的皇家军备制造厂成立
- 1872 Company founded by the Mauser brothers
毛瑟兄弟成立公司
- 1920 After world war one, the company expands its portfolio, inter alia to measuring devices and automobiles, like the Mauser Mono-Track-Car
第一次世界大战后，公司主要投资于测量仪器和汽车行业，比如毛瑟的单轨道汽车
- 1923 The first Mauser special sewing machine is introduced.
(German Patent: DE 410 952)
German T : 336 284 is established
第一台毛瑟特种缝纫机诞生。(德国专利号: DE 410 952)
德国商标336 284成立
- 1929 At the international exhibition in Barcelona, Mauser is awarded with the Grand Prix for its sewing machine Type BHE
在巴塞罗那的国际展览会上，毛瑟凭借缝纫机机种“BHE”被授予大奖
- 1950 The production of industrial sewing machines becomes part of IWK Augsburg AG “Mauser” introduces automatically lubricated coverlock sewing machines and the “Mauserlock-Armabwärts-Viernadel-Sechsfadenmaschine”
 (“Mauserlock” four needles six thread feed-off-the-arm machine)
工业缝纫机成为卡尔斯鲁厄奥格斯堡工业厂股份公司生产产品的一部分
毛瑟引进有自动供油功能的包缝和绷缝两用机和“Mauserlock”
(四针六线曲臂机)
- The trade mark “MAUSER SPEZIAL” is established
(German TMs DE 618 326)
“MAUSER SPEZIAL” 商标成立。
(德国商标号: DE 618 326)
- 1975 The “MAUSER SPEZIAL”-product line is bought by G. M. Pfaff AG (today Pfaff Industriesysteme und Maschinen GmbH)
G. M. Pfaff AG 收购 “MAUSER SPEZIAL” 的产品线(现百福工业系统及机械有限责任公司)
- 2010 New Logo and TMs are introduced
European TMs: 9 928 805, 9 359 167
新的徽标和商标成立。
欧洲商标号: 9 928 805, 9 359 167
- 2013 SG Group Co. Ltd. takes over Pfaff
上工申贝(集团)股份有限公司收购百福公司
- 2016 New Logo and TMs are introduced
新的徽标和商标成立。




机器说明/Machine Description

本系列机型为一体型上下复合送料厚料平缝机。采用鲍麦克斯最新款一体型电控，配备了动力强劲的 750W 驱动电机，具有自动剪线、自动倒缝、自动夹线、自动松线等功能，适用于缝制箱包、沙发、皮革等中厚料、厚料并且线迹优美，同时还可选配自动抬压脚。

This series of models is an integrated upper and lower compound feed thick material lockstitch sewing machine. Adopt Powermax latest integrated electric control, equipped with a powerful 750W drive motor, with functions such as automatic thread trimming, automatic reverse sewing, automatic clamping, automatic loosening, etc., suitable for sewing bags, sofas, leather, etc. Thick material, thick material and beautiful stitches, and optional automatic presser foot lift.

型号描述/Model Descriptions

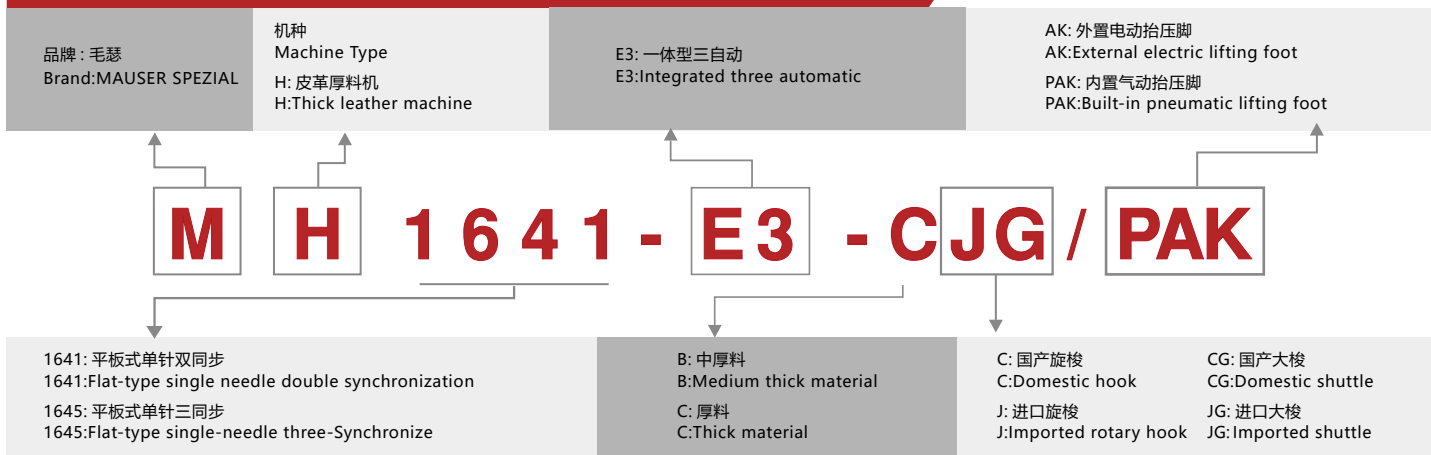

技术参数/Technical Data

| Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon | Icon |
|-------------------|------|------|------|------|------|------|------|------|------|----------|------|------|------|-------------|-----------|
| MH 1641E3-CJG | ★ | ★ | — | ★ | ★ | — | 38 | 9 | 7/16 | DP×17#22 | 2200 | — | ★ | 750×300×650 | 48.5/58.5 |
| MH 1645E3-CJG | ★ | — | ★ | ★ | ★ | — | 38 | 9 | 7/16 | DP×17#22 | 2200 | — | ★ | 750×300×650 | 48.5/58.5 |
| MH 1641E3-CJG/PAK | ★ | ★ | — | ★ | ★ | ★ | 38 | 9 | 7/16 | DP×17#22 | 2200 | — | ★ | 750×300×650 | 48.5/58.5 |
| MH 1645E3-CJG/PAK | ★ | — | ★ | ★ | ★ | ★ | 38 | 9 | 7/16 | DP×17#22 | 2200 | — | ★ | 750×300×650 | 48.5/58.5 |

备注：标配为鲍麦克斯电控，松线装置，国产旋梭，可选配进口梭。

Remarks: The standard configuration is Powermax electric control, thread release device, domestic rotary hook, and optional imported shuttle.

本机优势/Advantages



集成内嵌式的大屏操作面板
外观更美观，操作更加简便
Integrated embedded large-screen operation panel
More beautiful appearance and easier operation



新款压脚交互量调节结构
新款绕线器，优化设计、方便操作
New adjustment structure of presser foot interaction
New winding device, optimized design and convenient operation



压脚摆动轴内藏，气缸内置
配备电磁铁自动松线
Built-in swing shaft of presser foot, built-in cylinder,
Equipped with electromagnet automatic thread release



新款自锁标盘，避免缝制时跑位
倒缝扳手前移，使用操作方便
New self-locking dials to avoid running out of position
during sewing. Backward wrench moves forward, easy to
use and operate



搭载鲍麦克斯新款四代电控、电机，
结构密闭防尘，起步快、停车稳
Equipped with Powermax new fourth-generation
electric control and motor. Sealed and dustproof
structure, quick start and stable parking

技术参数:

最高转速:

2200 rpm

Maximum speed:

2200 rpm

压脚交互量:

2-5.5mm

Presser foot interaction:

2-5.5mm

挑线杆行程:

73mm

Thread take-up stroke:

73mm

马达:

伺服马达 750W

Motor:

Servo motor 750W



关注企业微信公众号
上工申贝集团



关注企业微信公众号
DAPShanghai



ORIGINATED FROM
GERMANY

上工申贝（集团）股份有限公司
Shang Gong Group Co., Ltd.

上海市浦东新区新金桥路1566号金苑楼
Jinyuan Building, 1566 Xinqinqiao Road,
Shanghai 201206, China

Tel :+(86)21 6393 8822

Fax:+(86)21 6307 8413

E-mail:info@dap-china.com

Internet:www.sgsbgroup.com